

METRIC SCREW JACKS

Joyce/Dayton offers Metric Screw Jacks in several designs including:

- Translating
- Keyed for non-rotation
- Keyed for traveling nut (KFTN)
- Double clevis

A guide for ordering is on pages 72 and 73.

Joyce metric screw jacks, series MWJ, are specifically designed for positioning and lifting applications that must be fully metric. These jacks are commonly used in OEM machinery manufactured in the U.S. and shipped to other countries around the world. They are fully interchangeable with several European products.

Metric screw jacks are available in four capacities: 10 kN, 25 kN, 50 kN, and 100 kN. MWJ screw jacks feature:

- Industry standard metric (trapezoidal) lifting screw diameters and pitches.
- Fully metric mounting hole locations, diameters and fasteners.
- Alloy steel worm shafts and bronze wormgears and traveling nuts.
- Tapered roller or ball thrust bearings provide rugged reliability.

Both upright and inverted configurations of these precision jacks operate at full capacity whether the load is in tension or compression. All MWJ jacks are self-locking under full capacity.

Metric screw jacks are available with one of four standard screw ends or special ends to meet your requirements. Double input shafts are standard. An optional anti-backlash feature (pages 180 and 181) compensates for thread wear, assuring minimum play between lifting screw and wormgear for smooth, precise operation. All jack designs can be fitted with protective boots.

Joyce/Dayton can customize metric screw jacks to meet your specifications.



© Joyce/Dayton Corp., 2016



METRIC SCREW JACKS ORDERING INFORMATION

Instructions: Select a model number from this chart.

10 kN	25 kN	50 kN	100 kN
MWJ51 MWJ201	MWJ62.5 MWJ122.5 MWJ242.5	MWJ65 MWJ125 MWJ245	MWJ810 MWJ2410


Sample Part Number: **MWJ65U2S-300-STDX-STDX-B**

Jack Configuration





U=Upright **I**=Inverted


End Conditions




1=T1
(plain end)



2=T2
(load pad)




3=T3
(threaded end)



4=T4
(male clevis)


Left Side Shaft Code
(see below)



XXXX=Remove
STDX=Standard

For optional shaft codes, see page 73.

Right Side Shaft Code
(see below)



XXXX=Remove
STDX=Standard

For optional shaft codes, see page 73.

Additional Options

X=Standard Jack, no additional options

S=Additional Specification Required (comment as necessary)

Anti-Backlash p. 180
A=Split Nut
A90=A90 Design
A95=A95 Design

Protective Boots pp. 170-172
B=Protective Boot
D=Dual Protective Boot

Finishes p. 179
F1=Do Not Paint
F2=Epoxy Paint
F3=Outdoor Paint Process

Motor Options
M1=Less Motor
M2=Brake Motor
M3=Single Phase Motor (120VAC)
M4=50Hz Motor

Grease/Seals
H1=High Temperature Operation
H2=Food Grade


Screw Stops
ST0=Extending
ST1=Retracting
ST2=Both

• Specify as many options as needed


Metric Screw Jack Rise

Rise is travel expressed in millimeters and not the actual screw length.


Jack Designs




S=Translating




K=Keyed for Non Rotation



N=Traveling Nut



D=Double Clevis*



A=KFTN Trunnion*
T=Trunnion*

*Contact Joyce/Dayton with your requirements.

METRIC SCREW JACKS SHAFT CODES

Instructions: Select the appropriate shaft codes for both right and left hand shafts. One shaft code must be specified for each side of the jack.

Screw Stops (p. 10) and Boots (pp. 170-172)

Screw stops are optional on metric screw jacks. When specified, the closed height of the jack and the protection tube length may be increased.

When boots are added to metric jacks, the closed height of the jack may be increased.

Mechanical Counters (p. 177)

CNT0=0.025 mm increments

Note: Contact Joyce/Dayton for availability and options.



Hand Wheels (p. 177)

HW04 = 4" dia. (102 mm)

HW06 = 6" dia. (152 mm)

HW08 = 8" dia. (203 mm)

HW10 = 10" dia. (254 mm)

HW12 = 12" dia. (305 mm) Recommended for self-locking jacks only.



Geared Potentiometers (p. 176)

POTA=0-10V (IP65)

POTB=4-20MA (IP65)

POTC=0-10V w/2 switches*

POTD=4-20MA w/2 switches*

*Optional IP65 rating available.



Encoders and Electronic Limit Switches

ENCX=Encoder (p. 178)

ELS2=2 Position Electronic Switch

ELS4=4 Position Electronic Switch

ELS6=6 Position Electronic Switch



Motors for Systems and Direct Drives (p. 185)

- All standard motors are 3-phase, 208-230/460 VAC or 230/460 VAC. Other motor options are available. Specify the appropriate motor size from the chart on the right.
- Refer to the "Additional Options" chart on the preceding page as needed.
- If the motor frequency will be varied to provide a "soft" start, an inverter duty motor may be required.
- International voltage motors are available.

Motors

Size	Code
1/4 HP	K
1/3 HP	A
1/2 HP	B
3/4 HP	C
1 HP	D
1-1/2 HP	E
2 HP	F
3 HP	L
5 HP	G

Motor Mounts (p. 185)

Ordering Example:

MMA A


MMA=56C

MMB=140TC

MMC=180TC

MMD=210TC









































Motor code from chart at left



- Standard motor adapters are aluminum.
- Motor adapters for many IEC motors are available as an option.

Mechanical Limit Switches (pp. 174-175)


Ordering Example: **LA13**

Models		Number of DPDT Switches (see p. 175)	Available Positions								
Model	Code			1	2*	3	4*	5	6*	7*	8*
LS7-402	LI		Left Side Shaft Options								
LS8-402	LA										
LS8-404	LB		Right Side Shaft Options								
LS9-502	LC										
LS9-503	LD										
LS9-504	LE										
LS9-505	LF										
LS9-506	LG										
LS9-507	LH	• 25 kN, 50 kN, and 100 kN metric jacks are available with positions #1, #3, and #5. *These positions are not standard. Contact Joyce/Dayton with your requirements.									

• 25 kN, 50 kN, and 100 kN metric jacks are available with positions #1, #3, and #5.
*These positions are not standard. Contact Joyce/Dayton with your requirements.

METRIC SCREW JACKS COLUMN LOADING

Metric Screw Jacks Column Loading Chart

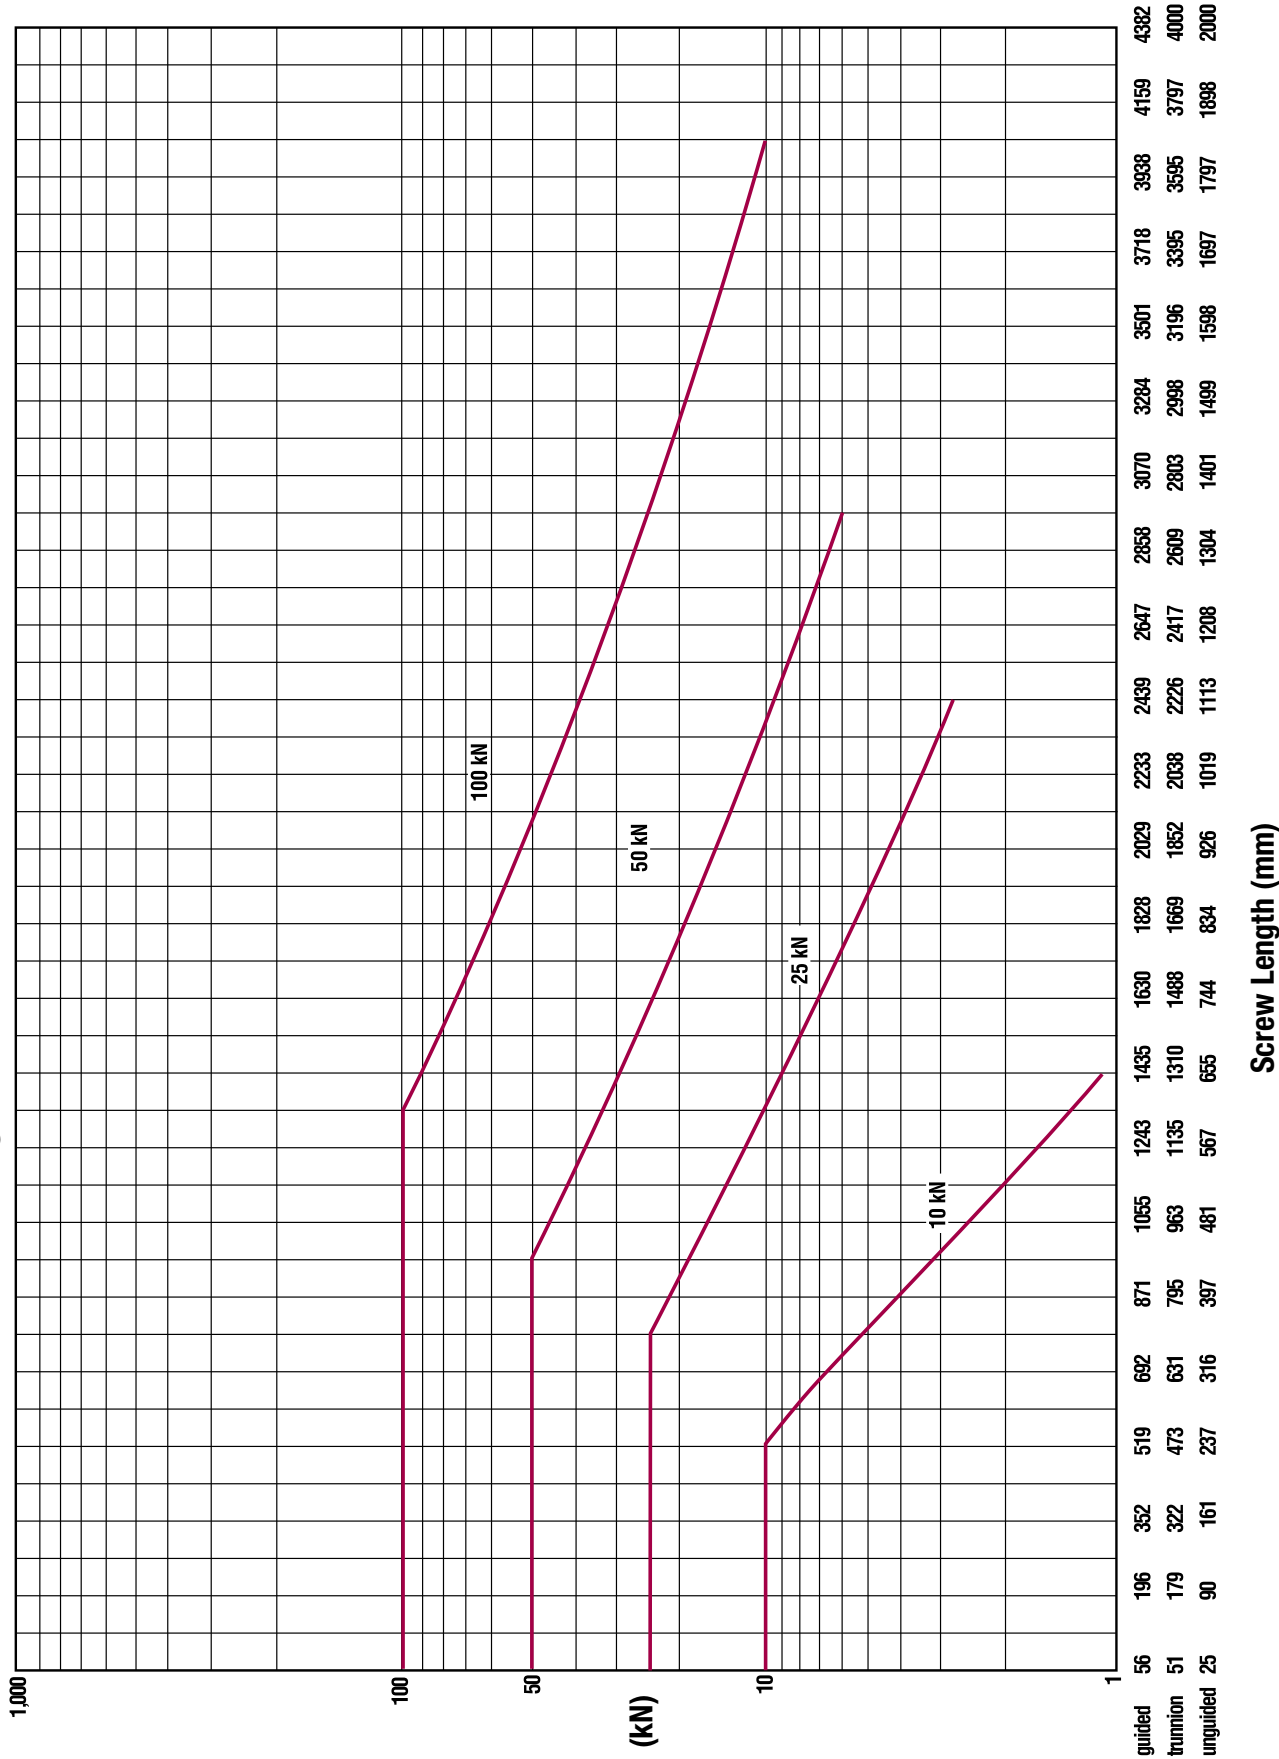

This chart includes a 2:1 Factor-of-Safety based on the Euler-Johnson equation for column loading. The horizontal portion of each line represents the jack's maximum static capacity. Under static conditions, these lines can be exceeded. Please contact the factory for assistance.

METRIC SCREW JACKS SPECIFICATIONS

Model	Capacity	Screw Diameter (mm)	Thread Pitch/Lead	Worm Gear Ratio	Worm Shaft Turns for 1mm Travel	Tare Torque (Nm)	Starting Torque (Nm)	Operating Torque (Nm)	Efficiency Rating % Approx.	Screw Torque (Nm)	Basic Jack Weight (Kg)	Jack Weight (Kg) per 25mm Travel
MWJ51	10kN	20	5mm	5:1	1	0.33	.95W*	.70W* @ 500 RPM	22.7	2W*	2.7	0.14
MWJ201				20:1	4		.41W*	.23W* @ 500 RPM	17.0			
MWJ62.5	25kN	30	6mm	6:1	1	0.67	1.01W*	.81W* @ 500 RPM	19.6	3W*	6.8	0.18
MWJ122.5				12:1	2		.62W*	.45W* @ 500 RPM	17.8			
MWJ242.5				24:1	4		.44W*	.27W* @ 500 RPM	14.7			
MWJ65	50kN	40	9mm	6:1	0.67	1.13	1.64W*	1.14W* @ 300 RPM	20.9	4W*	14.5	0.32
MWJ125				12:1	1.33		1.03W*	.64W* @ 300 RPM	18.7			
MWJ245				24:1	2.67		.74W*	.39W* @ 300 RPM	15.2			
MWJ810	100kN	55	12mm	8:1	0.67	2.26	1.53W*	1.18W* @ 200 RPM	20.2	5W*	19.5	0.59
MWJ2410				24:1	2		.76W*	.49W* @ 200 RPM	16.1			

*W: Load in kN.

Tare Torque: Initial torque to overcome seal and normal assembly drag. This value must be added to starting torque or operating torque values.

Starting Torque: Torque value required to start moving a given load (dissipates to operating torque values once the load begins moving).

Operating Torque: Torque required to continuously raise a given load at the input RPM listed.

Note: If your actual input RPM is 20% higher or lower than the listed RPM, please refer to our JAX® program to determine actual torque values at your RPM.

Screw Torque: Torque required to resist screw rotation (Translating Design Jacks) and traveling nut rotation (Keyed for Traveling Nut Design Jacks).

Lead: The distance traveled axially in one rotation of the lifting screw.


Pitch: The distance from a point on a screw thread to a corresponding point on the next thread measured axially.

METRIC SCREW JACKS


10kN - 20mm SCREW

MWJ 51
MWJ 201


Upright

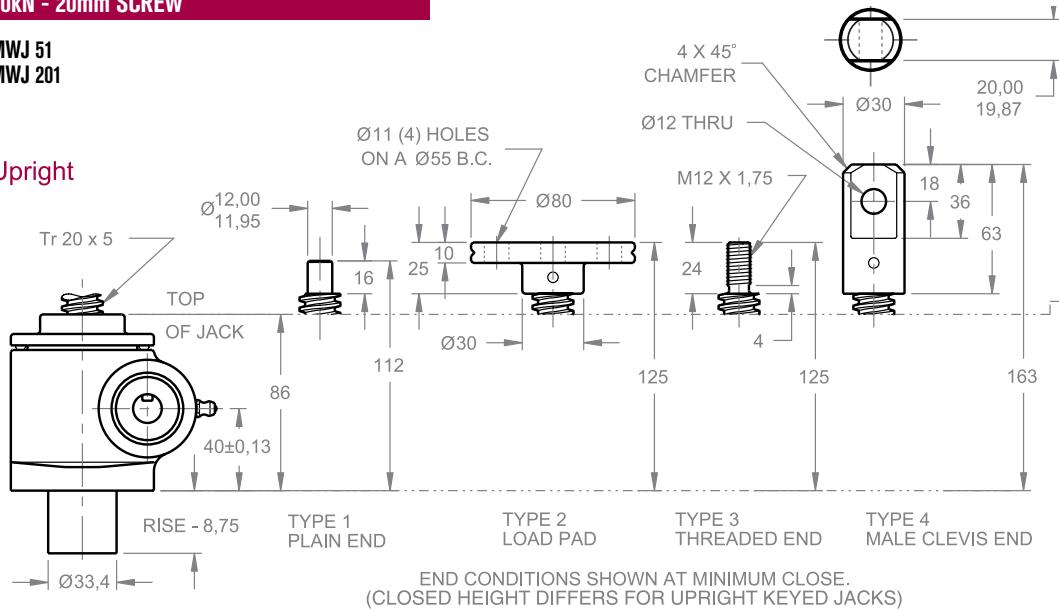


Upright keyed




Upright traveling nut

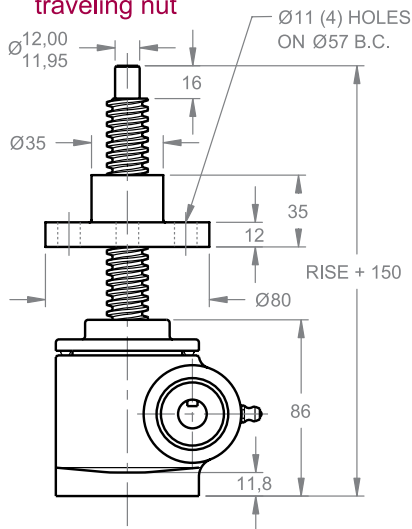


Typical Plan View

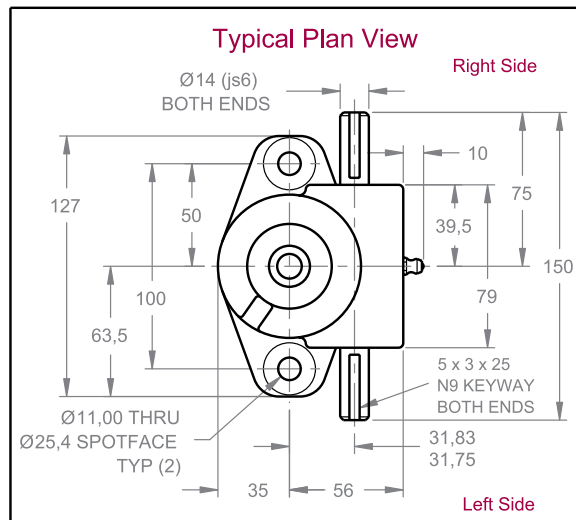


Inverted traveling nut

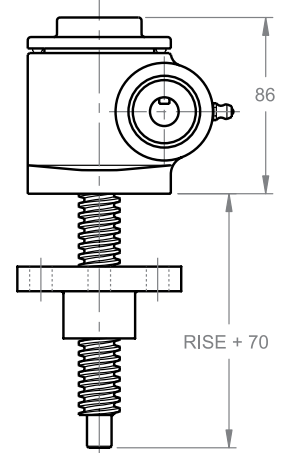

Inverted

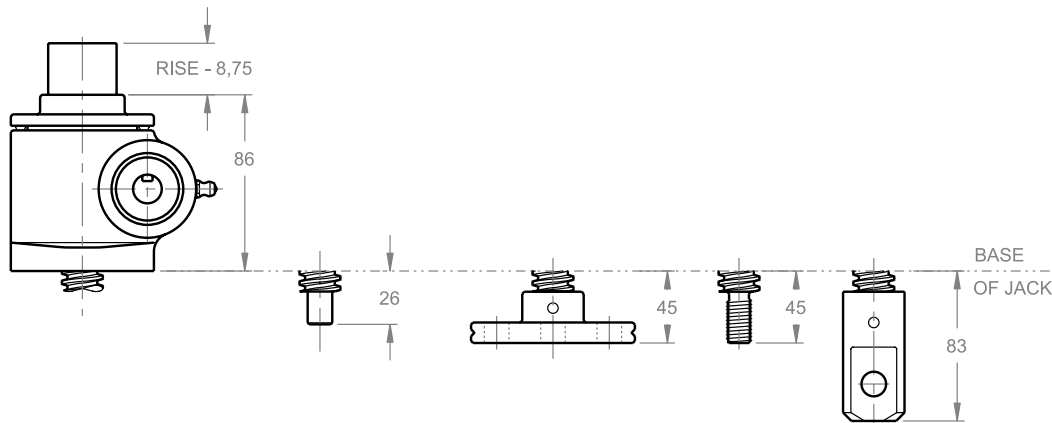


Inverted keyed





Note: Drawings are artist's conception — not for certification; dimensions are subject to change without notice.

METRIC SCREW JACKS


25kN - 30mm SCREW

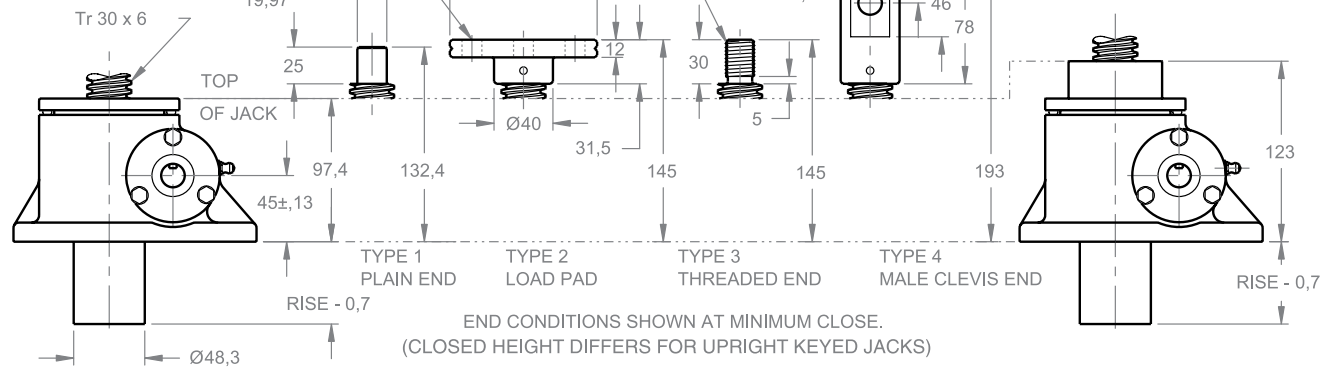MWJ 62.5**MWJ 122.5****MWJ 242.5**


Upright
traveling nut

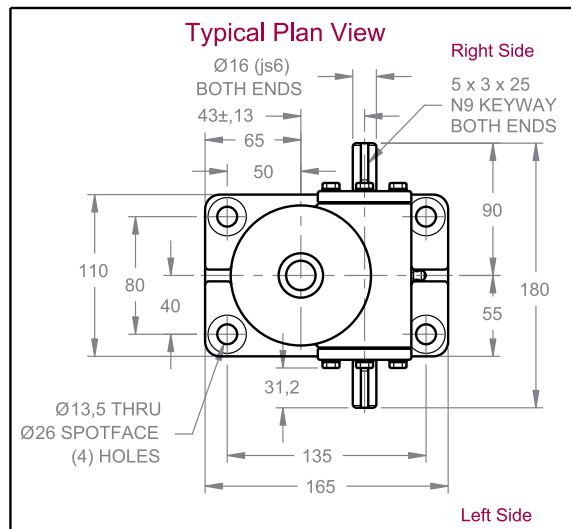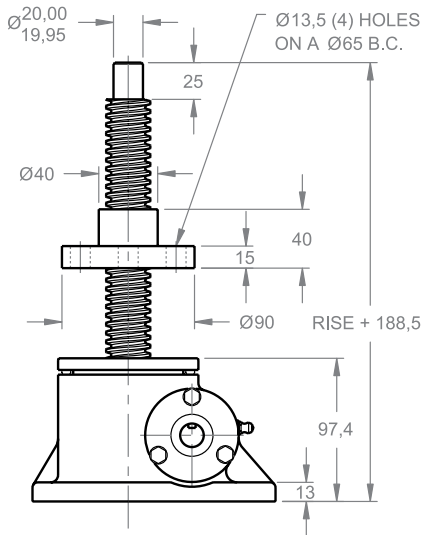

Inverted
traveling nut

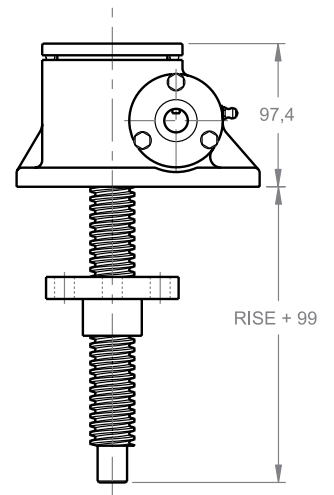

Inverted






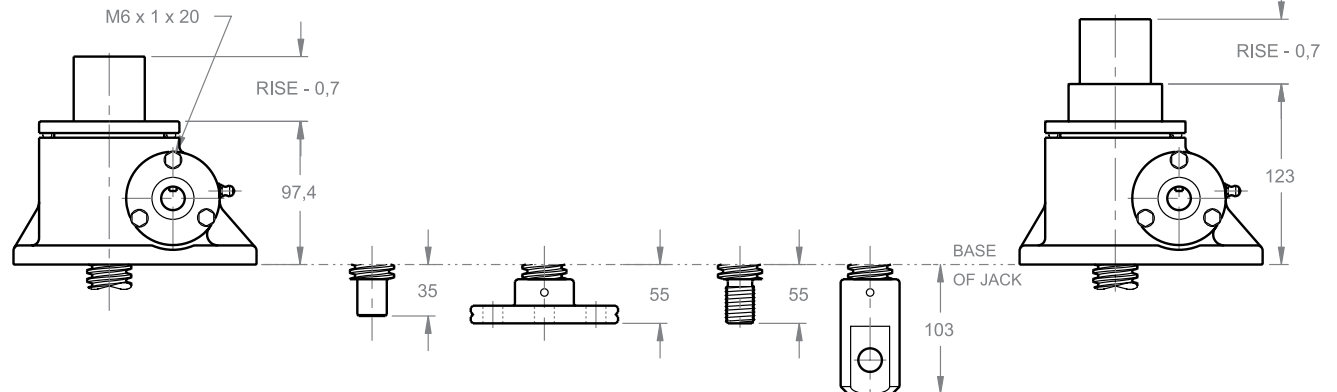


Note: Drawings are artist's conception — not for certification; dimensions are subject to change without notice.

METRIC SCREW JACKS

50kN - 40mm SCREW

MWJ 65
MWJ 125
MWJ 245

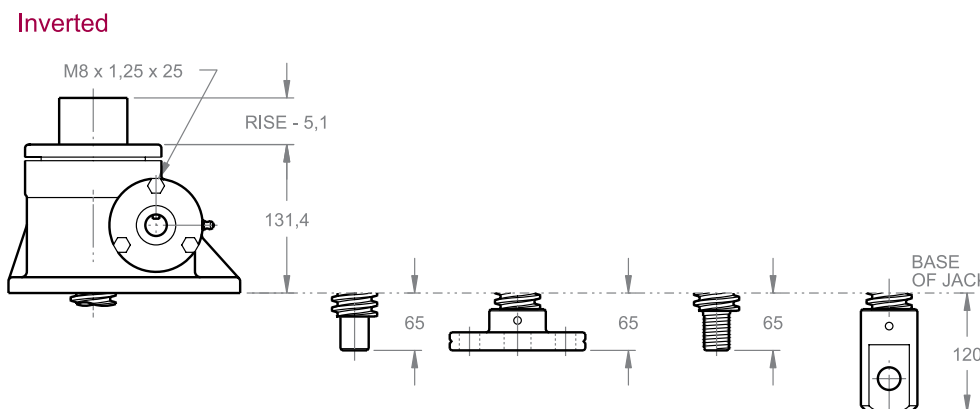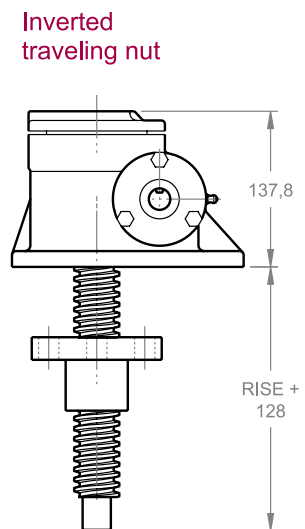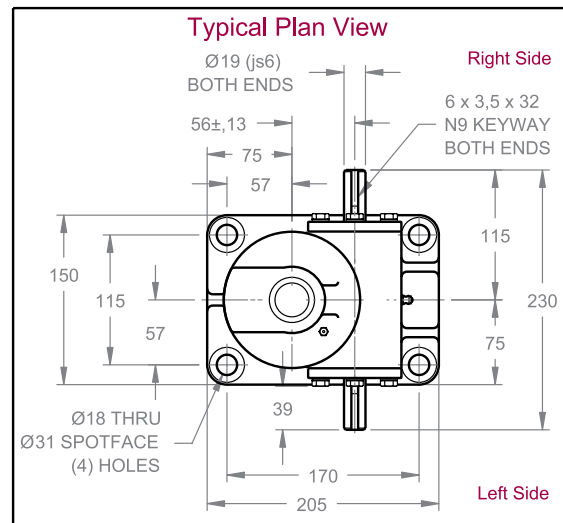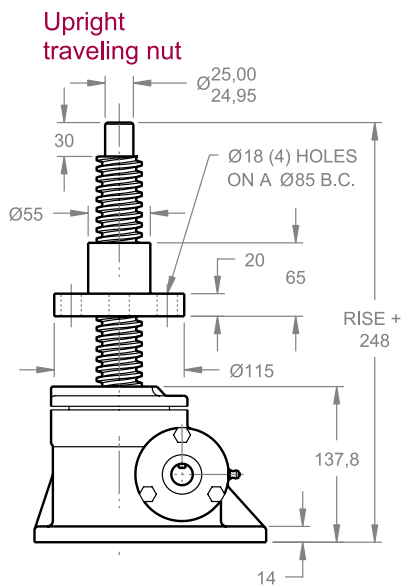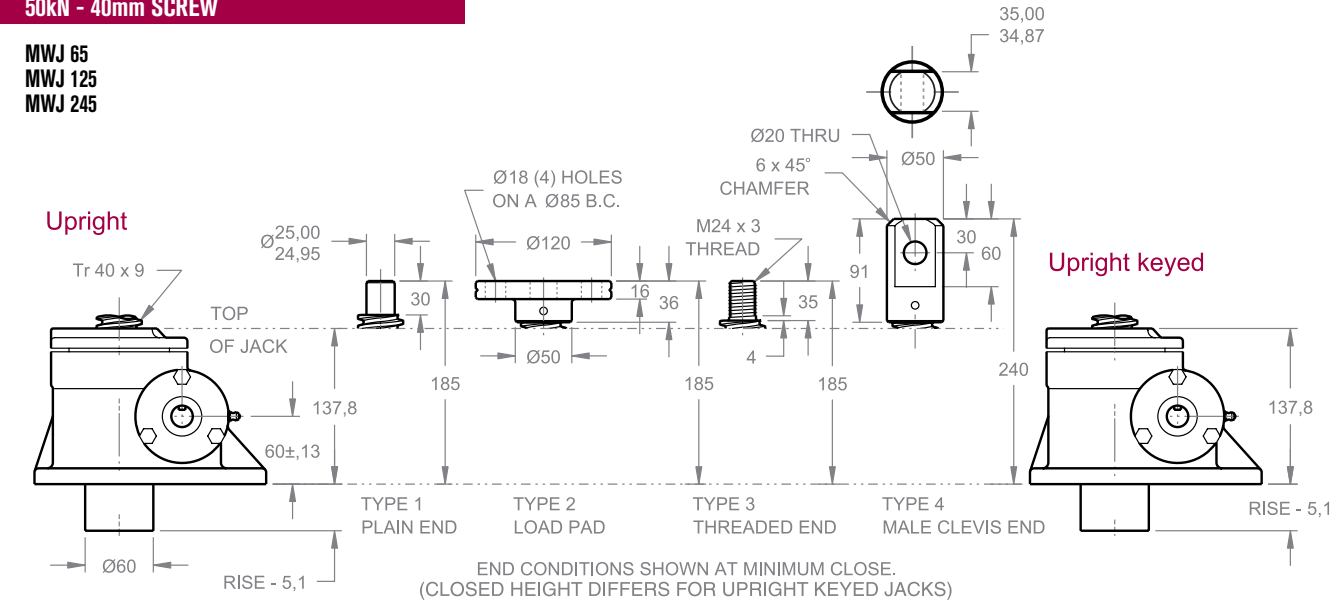


Note: Drawings are artist's conception — not for certification; dimensions are subject to change without notice.

METRIC SCREW JACKS


100kN - 55mm SCREW

MWJ 810
MWJ 2410


Upright

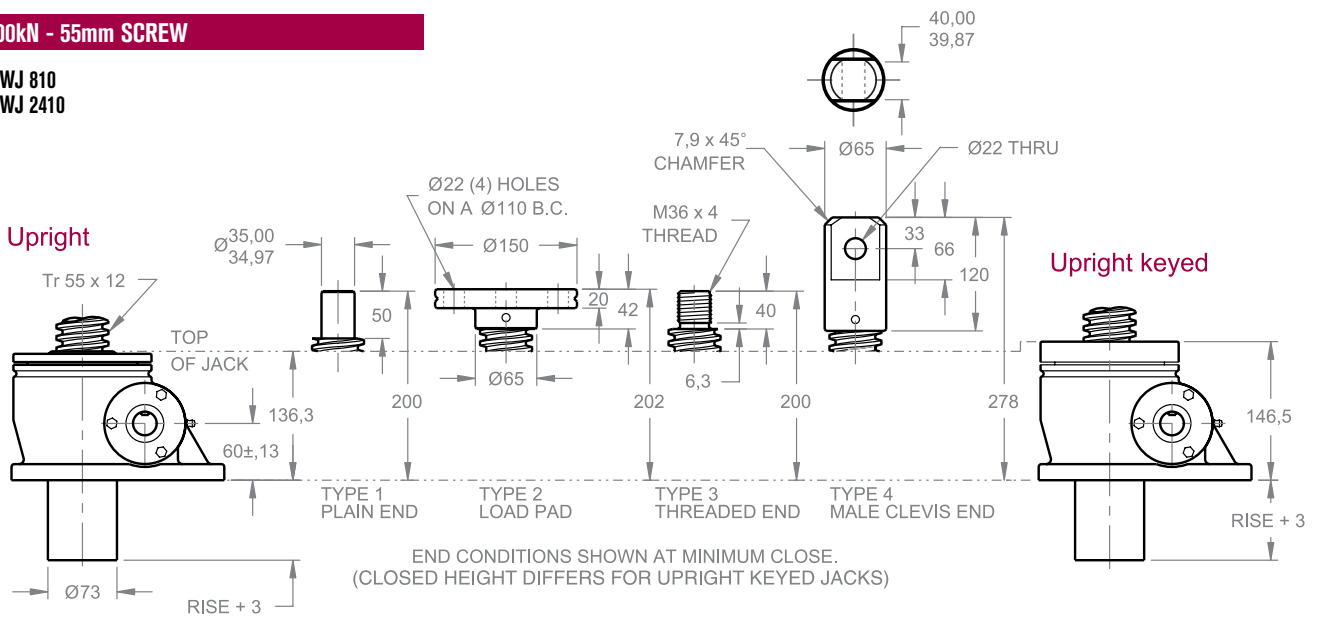


Upright traveling nut

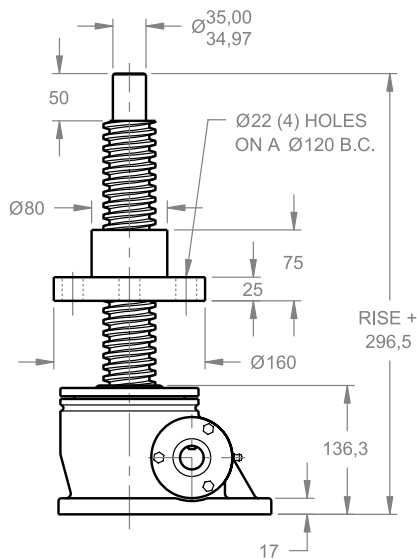


Typical Plan View

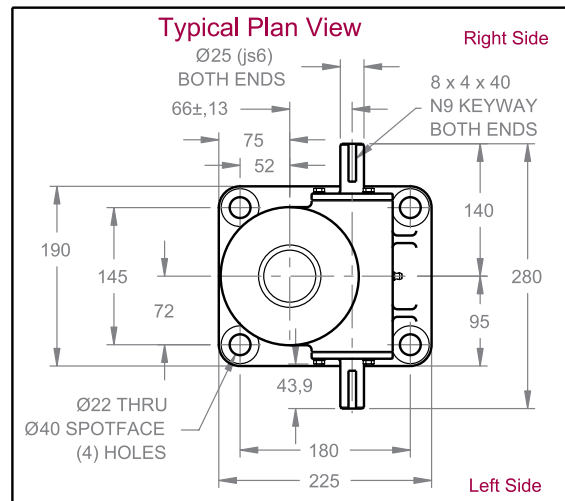


Inverted traveling nut

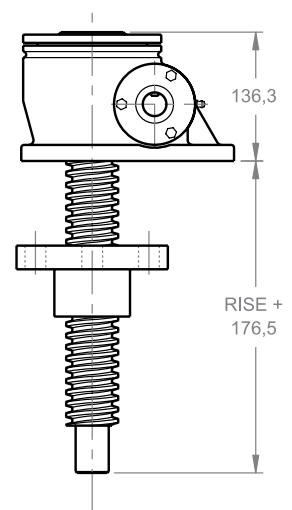

Inverted

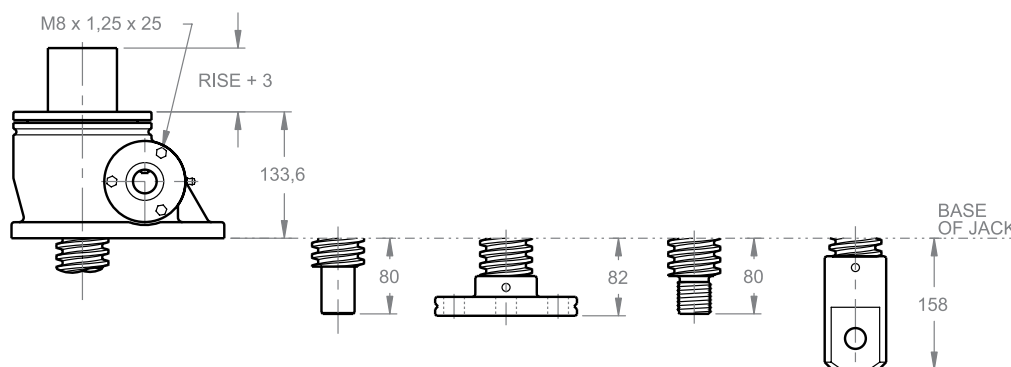

Inverted keyed

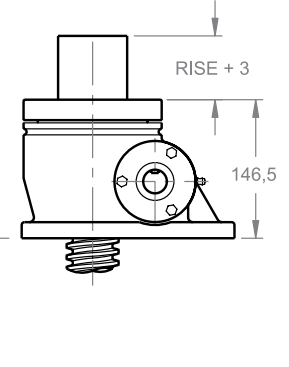

Note: Drawings are artist's conception — not for certification; dimensions are subject to change without notice.