

# Eliminator HDL™ Actuator

## ELIMINATOR HD + INTEGRATED LOAD CELL

The Eliminator HDL combines all the precision features of the HD series with the additional benefit of an integrated load cell, providing continuous and accurate measurement of applied loads and force. This heavy-duty, rugged linear actuator provides a clean, simple, and economical solution for your high-speed precision thrust applications.



### *Ideal for a Variety of Applications Including:*

- Process Monitoring
- Prototyping
- Force Control
- Hydraulic Replacement
- And More

### **Key Features:**

- “Measure while you Press” integrated load cell design
- Conforms to latest standard ASTM E4 for testing machines
- Rated forces up to 25,000 lbf
- High velocity up to 20 in/sec, stroke up to 48 inches
- Accurate to within 0.5% of rated force

# SPECIFICATION CHART FOR THE ELIMINATOR HDL ACTUATOR

Model Number	Thrust Load Rated	Linear Velocity Max. <sup>1</sup>	Travel Length Max. <sup>2</sup>	Frame Size	Lead	Ball Screw Diameter	Ball Screw Max. <sup>1</sup>	Torque @ Ball Screw Max.	Dynamic Capacity Per Million Revs	Dynamic Capacity Per Million Inches	Motor Gearhead Frame Supported Max. <sup>2</sup>
	lbr	in/s	in	in	mm	mm	RPM	in-lb	lbr	lbr	in
HDL201	1,000	8.0	12	2.00	4	16	3,048	28	1,529	825	2.75
HDL302	2,000	20.0	36	3.00	10	25	3,048	139	6,490	4,760	4.25
HDL304	4,000	20.0	36	3.00	10	25	3,048	278	6,490	4,760	4.25
HDL404	4,000	18.0	42	4.00	10	32	2,743	278	14,580	10,690	5.75
HDL406	6,000	18.0	42	4.00	10	32	2,743	418	14,580	10,690	5.75
HDL508	8,000	14.0	48	5.00	12	50	1,778	668	31,250	24,340	8.00
HDL516	16,000	14.0	48	5.00	12	50	1,778	1,337	31,250	24,340	8.00
HDL618	18,000	9.8	48	6.00	12	63	1,245	1,504	35,750	27,840	8.00
HDL625	25,000	14.4	48	6.00	20	80	1,097	3,481	52,150	48,160	8.00

Model Number	Inertia 1:1 Zero Stroke <sup>3</sup>	Inertia 1:1 Per Inch of Stroke <sup>3</sup>	Inertia 2:1 Zero Stroke <sup>3</sup>	Inertia 2:1 Per Inch of Stroke <sup>3</sup>	Inertia Inline Zero Stroke <sup>3</sup>	Inertia Inline Per Inch of Stroke <sup>3</sup>	Unit Weight "U" Motor Mount <sup>4</sup>	Unit Weight "L" Motor Mount <sup>4</sup>	Weight Per Inch of Stroke <sup>4</sup>
	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb	lb	lb
HDL201	0.51	0.0031	0.27	0.0008	0.04	0.0031	8	6	1
HDL302	4.31	0.0212	1.64	0.0053	0.34	0.0212	29	22	1
HDL304	4.87	0.0212	1.46	0.0053	0.38	0.0212	29	22	1
HDL404	23.24	0.0457	4.11	0.0114	1.99	0.0457	63	49	2
HDL406	23.24	0.0457	4.11	0.0114	1.99	0.0457	63	49	2
HDL508	139.27	0.2688	22.66	0.0672	5.92	0.2688	155	105	3
HDL516	139.36	0.2688	22.68	0.0672	6.00	0.2688	155	105	3
HDL618	281.96	0.7361	43.91	0.1840	12.31	0.7361	207	152	6
HDL625	295.02	1.8713	47.17	0.4678	25.37	1.8713	214	158	6

<sup>1</sup> Maximum velocity and maximum screw speed may not be achievable at maximum stroke.

<sup>2</sup> Larger Motor or Gearhead Frames and longer stroke lengths are available upon request.

<sup>3</sup> All inertia values are at the input shaft and are representative of typical pulleys, bushings, couplers, etc. Actual values may vary due to motor selection.


<sup>4</sup> Weight values are for reference only and vary depending on configuration.

"U" Parallel offset configuration


"L" Inline configuration

## DATA CURVES FOR THE ELIMINATOR HDL ACTUATOR

Dynamic Capacity: Life Vs. Load

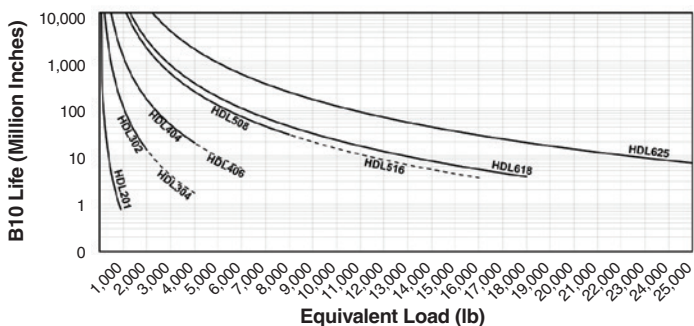


Dynamic Capacity: Speed Vs. Stroke

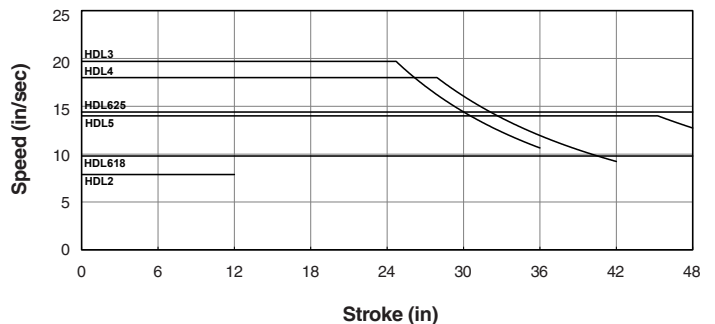


# DIMENSIONED DRAWINGS FOR THE ELIMINATOR HDL ACTUATOR

Dimensions in inches

## U-Parallel Offset Motor Configuration

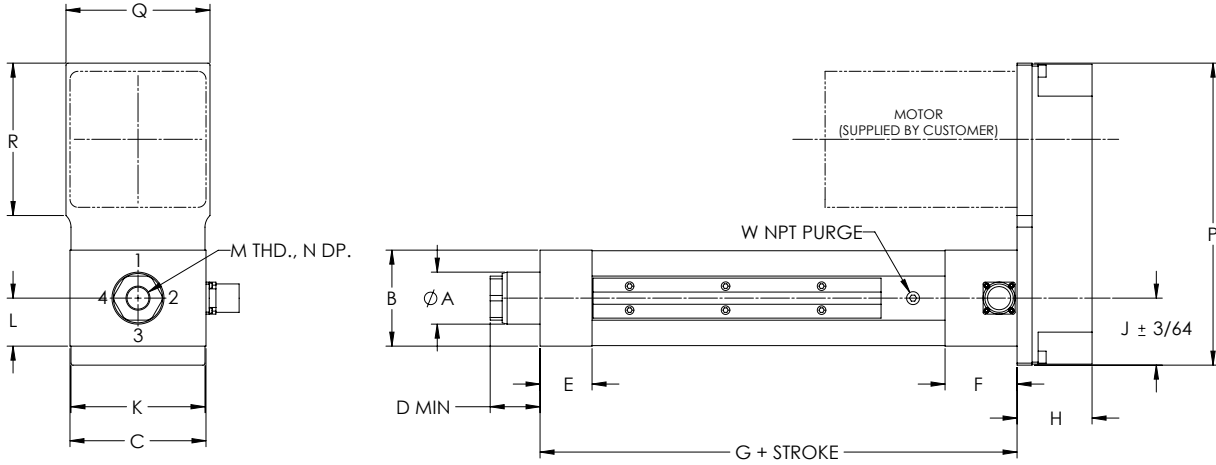

## L-Inline Motor Configuration

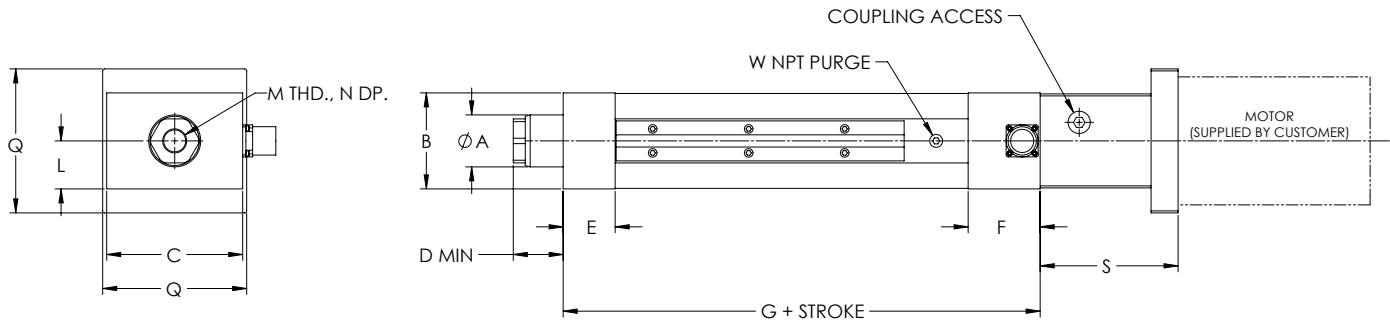

"S" length may vary depending on motor or gearbox.


### HDL U-Parallel Offset and L-Inline Motor Configuration

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	W
HDL201	1.13	2.00	3.00	1.04	1.00	1.75	6.34	1.63	1.48	2.97	1.00	1/2-20	1.00	6.30	2.97	N/A	2.66	1/8
HDL302	1.63	3.00	4.25	1.41	1.63	2.25	8.91	2.34	2.09	4.19	1.50	3/4-16	1.00	9.44	4.50	4.75	4.31	1/8
HDL304	1.63	3.00	4.25	1.56	1.63	2.25	8.91	2.34	2.09	4.19	1.50	3/4-16	1.00	9.44	4.50	4.75	4.31	1/8
HDL404	2.25	4.00	5.50	1.88	2.00	2.63	10.22	2.63	2.69	5.38	2.00	3/4-16	1.00	13.00	6.00	6.94	5.00	1/4
HDL406	2.25	4.00	5.50	1.79	2.00	2.63	10.22	2.63	2.69	5.38	2.00	3/4-16	1.00	13.00	6.00	6.94	5.00	1/4
HDL508	3.00	5.00	7.75	2.56	2.50	3.00	13.38	4.03	3.81	7.63	2.50	1 1/4-12	1.63	17.19	8.38	9.19	6.75	3/8
HDL516	3.00	5.00	7.75	2.56	2.50	4.00	14.38	4.03	3.81	7.63	2.50	1 1/4-12	1.63	17.19	8.38	9.19	6.75	3/8
HDL618	3.50	6.00	8.50	2.75	3.00	4.00	15.00	4.13	4.13	8.38	3.00	1 1/4-12	1.63	17.88	9.00	9.19	7.25	1/2
HDL625	4.00	6.00	8.50	2.75	3.00	4.00	17.75	4.13	4.13	8.38	3.00	1 1/4-12	1.63	17.88	9.00	9.19	7.25	1/2


# DIMENSIONED DRAWINGS FOR THE ELIMINATOR HDL ACTUATOR

Dimensions in inches


## Bottom Mount Dimensions

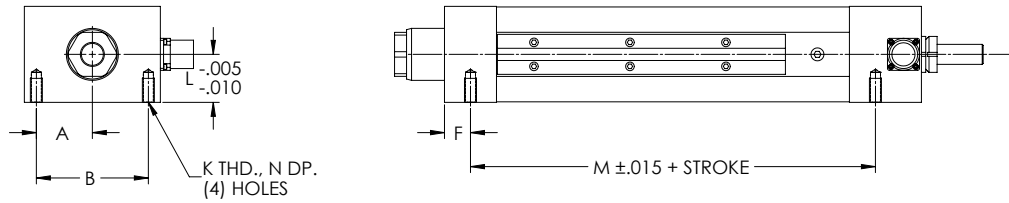


## Front Flange Dimensions

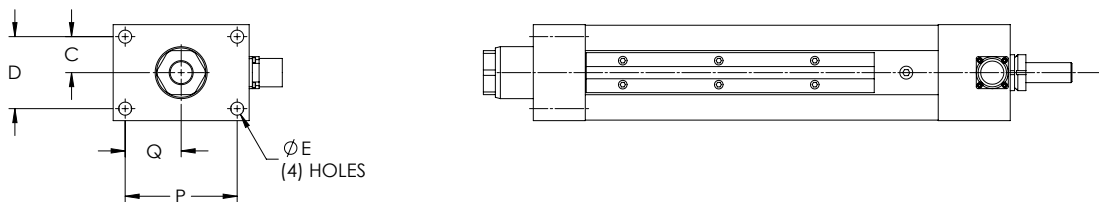

## Foot Mount Dimensions

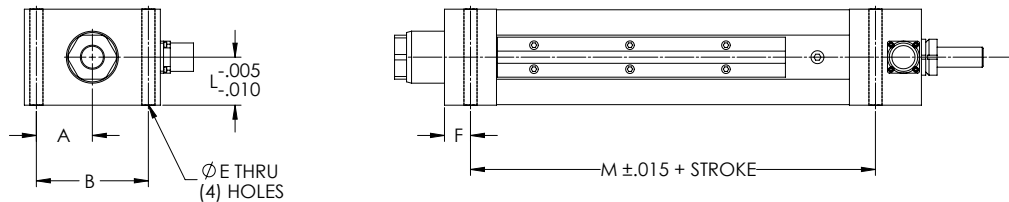

## Trunnion Mount Dimensions

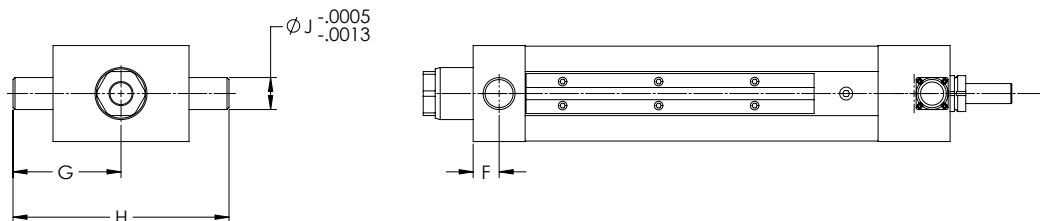

## HDL Mounting Dimensions (Bottom Mount, Front Flange, Foot Mount, Trunnion Mount)


Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
HDL201	1.13	2.25	0.69	1.38	0.34	0.49	2.24	4.48	0.50	5/16-18	0.99	8.61	0.63	2.38	1.19
HDL302	1.75	3.50	1.13	2.25	0.41	0.81	3.38	6.75	1.00	3/8-16	1.50	6.66	0.75	3.50	1.75
HDL304	1.75	3.50	1.13	2.25	0.41	0.81	3.38	6.75	1.00	3/8-16	1.50	6.66	0.75	3.50	1.75
HDL404	2.19	4.38	1.44	2.88	0.69	1.00	4.50	9.00	1.25	5/8-11	2.00	7.59	1.00	4.38	2.19
HDL406	2.19	4.38	1.44	2.88	0.69	1.00	4.50	9.00	1.25	5/8-11	2.00	7.59	1.00	4.38	2.19
HDL508	3.13	6.25	1.75	3.50	0.81	1.25	6.25	12.50	1.50	3/4-10	2.50	10.63	1.25	6.25	3.13
HDL516	3.13	6.25	1.75	3.50	0.81	1.25	6.25	12.50	1.50	3/4-10	2.50	10.63	1.25	6.25	3.13
HDL618	3.31	6.63	2.00	4.00	1.06	1.50	7.13	14.25	2.00	1-8	3.00	11.00	1.63	6.63	3.31
HDL625	3.31	6.63	2.00	4.00	1.06	1.50	7.13	14.25	2.00	1-8	3.00	13.75	1.63	6.63	3.31

# DIMENSIONED DRAWINGS FOR THE ELIMINATOR HDL ACTUATOR


Dimensions in inches

## Rod End Options


### Self-Aligning Coupler

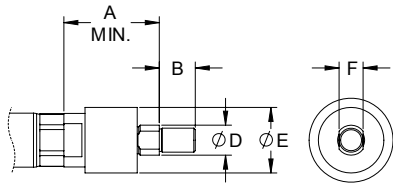


### Male Thread



### Spherical Rod Eye

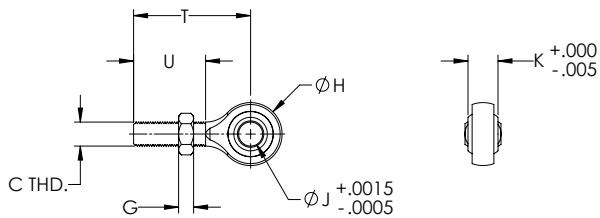

### Female Eye

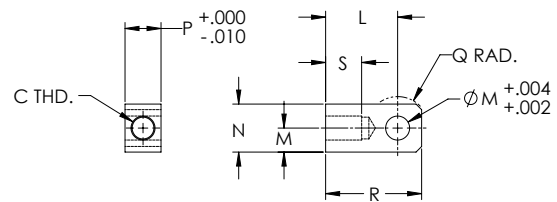


## HDL Rod End Dimensions

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U
HDL201	2.00	0.75	1/2-20	0.63	1.37	0.50	0.31	1.31	0.50	0.63	1.50	0.50	1.00	0.75	0.50	2.00	0.75	2.44	1.50
HDL302	2.31	1.13	3/4-16	0.97	2.00	0.75	0.42	1.75	0.75	0.88	2.06	0.75	1.50	1.25	0.75	2.81	1.13	2.88	1.75
HDL304	2.31	1.13	3/4-16	0.97	2.00	0.75	0.42	1.75	0.75	0.88	2.06	0.75	1.50	1.25	0.75	2.81	1.13	2.88	1.75
HDL404	2.31	1.13	3/4-16	0.97	2.00	0.75	0.42	1.75	0.75	0.88	2.06	0.75	1.50	1.25	0.75	2.81	1.13	2.88	1.75
HDL406	2.31	1.13	3/4-16	0.97	2.00	0.75	0.42	1.75	0.75	0.88	2.06	0.75	1.50	1.25	0.75	2.81	1.13	2.88	1.75
HDL508	2.94	1.63	1 1/4-12	1.45	3.13	1.25	0.72	2.75	1.00	1.38	3.44	1.38	2.75	2.00	1.38	4.81	2.00	4.13	2.13
HDL516	2.94	1.63	1 1/4-12	1.45	3.13	1.25	0.72	2.75	1.00	1.38	3.44	1.38	2.75	2.00	1.38	4.81	2.00	4.13	2.13
HDL618	2.94	1.63	1 1/4-12	1.45	3.13	1.25	0.72	2.75	1.00	1.38	3.44	1.38	2.75	2.00	1.38	4.81	2.00	4.13	2.13
HDL625	2.94	1.63	1 1/4-12	1.45	3.13	1.25	0.72	2.75	1.00	1.38	3.44	1.38	2.75	2.00	1.38	4.81	2.00	4.13	2.13

# ORDERING GUIDE FOR THE ELIMINATOR HDL ACTUATOR

## Ordering Information

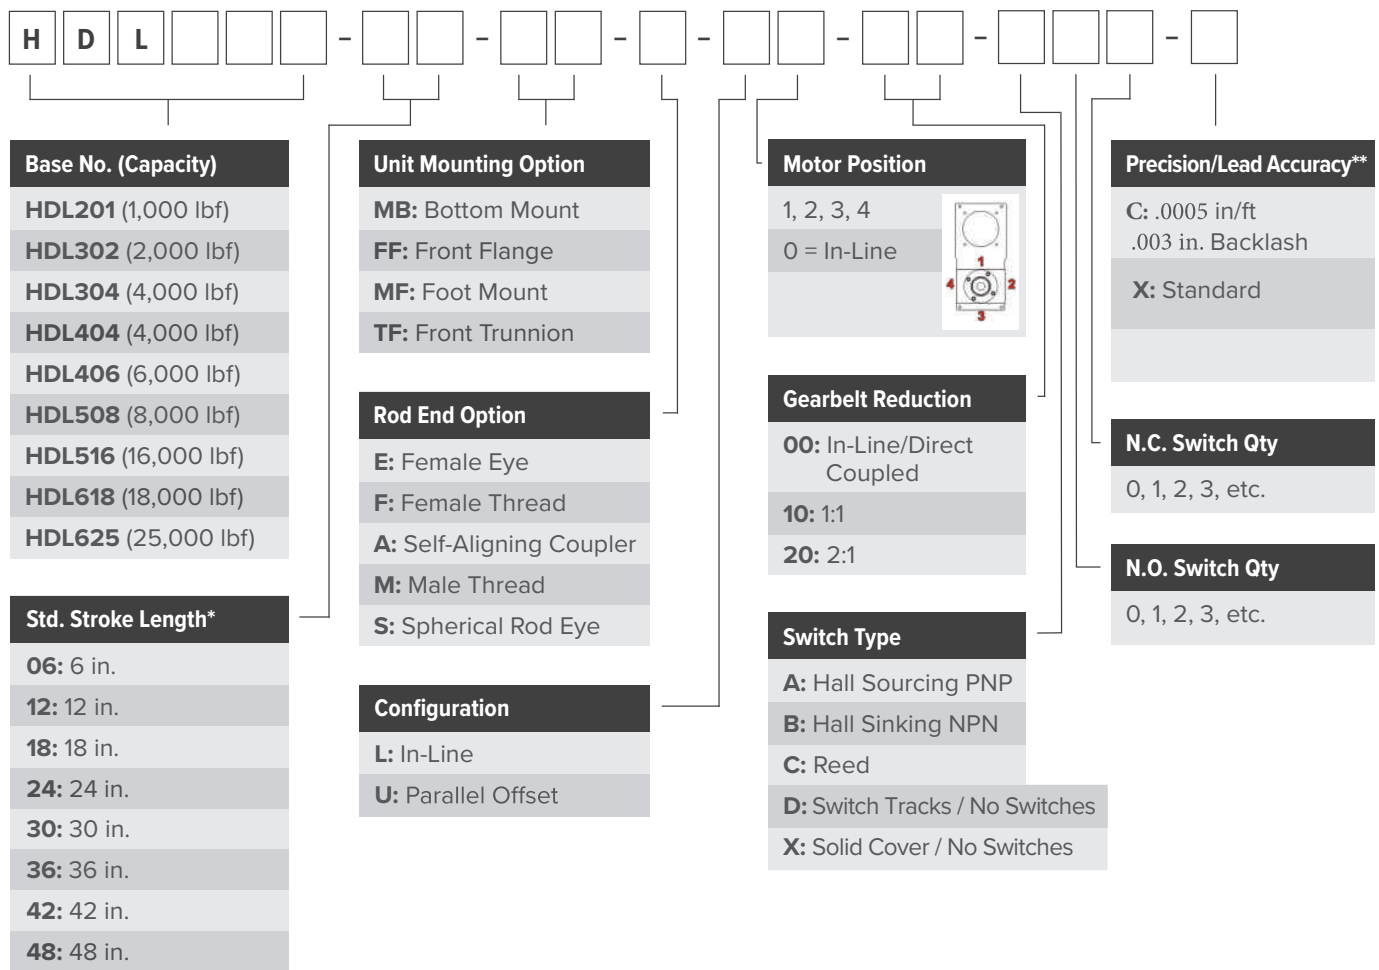

For custom stroke lengths, contact EDrive.

\* HDL201 is available with stroke lengths up to 12 in.  
 HDL302 – HDL304 are available with stroke lengths up to 36 in.  
 HDL404 – HDL406 are available with stroke lengths up to 42 in.  
 HDL508 – HDL625 are available with stroke lengths up to 48 in.  
 \*\* HDL201 – Std. Precision/Lead Accuracy is 0.0005 in/ft, 0.003 in. Backlash